


ProRox® SL 960^{NA}

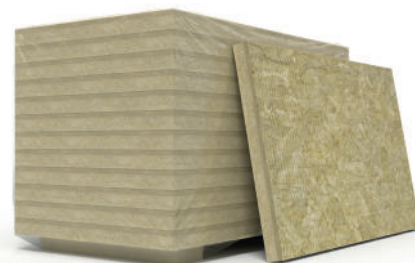

ProRox SL 960^{NA} is a rigid stone wool insulation board for high temperature industrial applications subject to light mechanical loads.

Application

The slab (board) is suitable for the thermal and acoustic insulation of high temperature industrial applications, such as boilers, vessels, columns and flue gas ducts.

Product properties in accordance with ASTM C612¹⁾

Property	Performance								Test standard
Thermal conductivity at mean temperature	T_m (°F)	100	200	300	400	500	600	700	ASTM C177
	λ (BTU.in/hr.ft ² .°F)	0.24	0.29	0.35	0.41	0.47	0.56	0.68	
	T_m (°C)	38	93	150	204	260	316	371	
	λ (W/mK)	0.035	0.042	0.050	0.059	0.068	0.081	0.098	
Maximum use temperature	1200°F (650°C)								ASTM C411 / C447
Linear shrinkage	≤ 2% at 1200°F (650°C)								ASTM C356
Reaction to fire	Flame spread index = 0 Smoke development = 0								ASTM E84 UL723 / CAN ULC 102
Corrosion resistance	Stress corrosion cracking tendency of austenitic stainless steel = passed Chemical analysis (Cl ⁻ , F ⁻ , Na ⁺ , SiO ₄ ⁴⁻): results fall within acceptability limits of ASTM C795								ASTM C692 / C795 ASTM C871 / C795
Water absorption	≤ 0.2 lb/ft ² (≤ 1.0 kg/m ²)								EN 1609 / ISO 29767
Vapor sorption	< 1% Weight								ASTM C1104
Density ²⁾	Nominal density 8.0 lb/ft ³ (128 kg/m ³), Actual density 5.8 lb/ft ³ (93 kg/m ³)								ASTM C303

1) All values are nominal values for standard industrial production. Standard industrial production tolerances applicable.

2) Density is not a performance criteria but is commonly referred to when specifying insulation. Actual density is the true density of the insulation and nominal density is the effective density of the insulation relative to a historic benchmark where the insulation contained 40% non-fibrous content also known as shot (ASTM C612-99).

Compliance

- ProRox SL 960 fully complies with the requirements as set by internationally recognized standards like ASTM C612 type IVB.
- ROCKWOOL stone wool insulation is made from volcanic rock and is not classified as a hazardous substance in accordance with Note Q, regulation (EC) No. 1272/2008.



Disclaimer

As ROCKWOOL has no control over insulation design and workmanship, accessory materials or applications conditions, ROCKWOOL does not warranty the performance or result of any installation containing ROCKWOOL products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose. ROCKWOOL Technical Insulation reserves the right to make necessary product changes at any time. Technical specifications are thus stated subject to change.

ROCKWOOL® Technical Insulation, ROCKWOOL®, SeaRox® and ProRox® are registered trademarks of ROCKWOOL A/S and cannot be used without a prior written consent.